


Rivet BOM Acier Acier

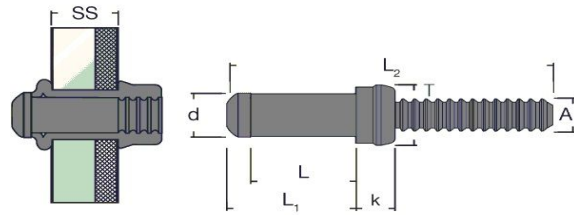

Corps : Acier - Tige : Acier

d (mm)	Diamètre trou SS	Résistance traction (DaN)	Résistance cisaillement (DaN)	Référence
4.8	5.28-5.64	800	1240	BOM-R6-g
6.4	7.04-7.42	1 440	2 260	BOM-R8-g
7.9	8.84-9.35	2 310	3 580	BOM-R10-g

9.5	10.49-11.05	3225	4930	BOM-R12-g
12.7	13.87-14.76	5780	8960	BOM-R16-g
15.9	17.45-18.49	9110	12670	BOM-R20-g
19.1	21.00-22.17	12940	20060	BOM-R24-g

grip	d 4.8	d 6.4	d 7.9	d 9.5	d12.7	d 15.9	d 19.1
2	2.36-3.96	2.36-3.96					
3	3.99-5.56	3.99-5.56					
4	5.59-7.14	5.59-7.14	4.78-7.92	4.78-7.92	6.38-9.53	6.38-12.70	6.38-12.70
5	7.16-8.74	7.16-8.74					
6	8.76-10.31	8.76-10.31	7.95-11.1	7.95-11.1	9.55-12.70		
7	10.34-11.91	10.34-11.91					
8	11.94-13.49	11.94-13.49	11.13-14.27	11.13-14.27	12.73-15.88	12.73-19.05	12.73-19.05
9	13.51-15.09	13.51-15.09					
10	15.11-16.66	15.11-16.66	14.30-17.45	14.30-17.45	15.90-19.05		
11	16.69-18.26	16.69-18.26					
12	18.29-19.84	18.29-19.84	17.48-20.62	17.48-20.62	19.08-22.23	19.08-25.40	19.08-25.40
14			20.65-23.80	20.65-23.80	22.25-25.40		
16			23.83-26.97	23.83-26.97	25.43-28.58	25.43-31.75	25.43-31.75
18				27.00-30.15	28.60-31.75		
20				30.18-33.32	31.78-34.93	31.78-38.10	
22					34.95-38.10		
24					38.10-41.28		