


**Rivet Rivscrew® 1722 acier
tête plate**

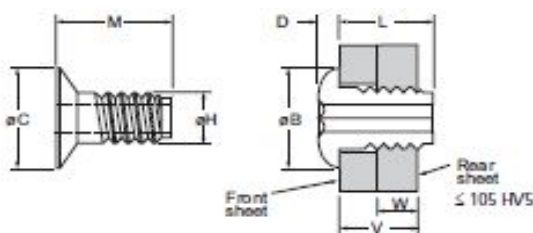

∅ (mm)	∅ D max (mm)	∅ perçage pièce à fixer (mm)	∅ perçage pièce support (mm)	∅ A max (mm)	C max (mm)	W (mm)	V max (mm)	∅E (mm)	F max (mm)	G max (mm)	R.ci. (kN)	Nbre rivets /chargeur +/-1	réf.
2.8	2.6	2.95-3.02	2.62-2.70	5.7	5.2	1.62	2.85	6.10	1.40	4.0	0.9	62	01722-02806
					6.1		3.85			5.0		52	01722-02807
					7.1		4.83			6.0		43	01722-02809
					8.1		5.82			7.0		38	01722-02810
					10.1		7.80			9.0		30	01722-02812
3	2.8	3.07-3.15	2.82-2.89	5.7	5.2	1.62	2.85	6.10	1.40	4.0	0.9	62	01722-03006
					6.1		3.85			5.0		52	01722-03007
					7.1		4.83			6.0		43	01722-03009
					8.1		5.82			7.0		38	01722-03010
					9.1		6.81			8.0		34	01722-03011
					10.1		7.80			9.0		30	01722-03012
					13.1		10.72			11.9		23	01722-03016
3.5	3.1	3.50-3.58	3.10-3.17	5.8	5.2	1.62	2.85	6.10	1.40	4.0	1	62	01722-03506
					6.1		3.85			5.0		52	01722-03507
					7.1		4.83			6.0		43	01722-03509
					8.1		5.82			7.0		38	01722-03510
					9.1		6.81			8.0		34	01722-03511
					10.1		7.80			9.0		30	01722-03512
					14.1		11.76			12.9		21	01722-03517
4	3.6	4.19-4.27	3.61-3.68	6	5.2	1.62	2.85	6.40	1.40	4.0	1	62	01722-04006
					6.1		3.85			5.0		52	01722-04007
					7.1		4.83			6.0		43	01722-04009
					8.1		5.82			7.0		38	01722-04010
					9.1		6.81			8.0		34	01722-04011
					10.1		7.80			9.0		30	01722-04012
					12.1		9.78			11.9		25	01722-04015